

**APPLICATION:**  
TELESCOPIC FIXED SIDELITE BI-PART,  
AUTOMATIC SLIDING DOOR SYSTEM.




NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)

AUTOMATIC SLIDING DOOR OPERATOR SHALL BE "DS18"  
CUL USA APPROVED, CONFORMING TO UL STD. 325 &  
ANSI-BHMA STD. A156.10 CERTIFIED TO CAN. CSA STD.  
C22.2#24-93 AS MANUFACTURED BY ENTREMATIC GROUP  
AB.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;  
SPECIAL FINISHES ARE AVAILABLE

**UNIT DESCRIPTION**  
**DITEC**  
O-X-SX-SX-X-O : OVERHEAD CONCEALED TELESCOPIC  
FIXED SIDELITE SLIDE DOOR SYSTEM, NARROW STILE DOORS.  
PACKAGE SHALL INCLUDE AUTOMATIC OPERATOR, FRAME AND DOORS  
WITH MUNTINS, BOTTOM RAILS WITH CONCEALED SWEEPS,  
BRUSH-PILE WEATHER STRIPPING, EMERGENCY BREAKAWAY, MS LOCK,  
GLAZING STOPS FOR TEMPERED GLASS, DOOR GUIDE  
SYSTEM SHALL BE CONCEALED IN BOTTOM HORIZONTAL RAILS, 3-WAY  
SWITCH & MOTION/PRESENCE SENSORS ON BOTH SIDES OF UNIT.

SIZE	OVERALL FRAME WIDTH A	ROUGH OPENING B	EQUAL PANELS C	NET DOOR OPENING D	BREAK OUT E DIM'N.
120"	120" (3048)	120 1/2" (3060.7)	21 1/4" (539.8)	58 3/4" (1492.3)	66 1/2" (1689.1)
144"	144" (3657.6)	144 1/2" (3670.3)	25 1/4" (641.4)	74 3/4" (1898.7)	82 1/2" (2095.5)
168"	168" (4267.2)	168 1/2" (4279.9)	29 1/4" (743)	90 3/4" (2305.1)	98 1/2" (2501.9)
192"	192" (4876.8)	192 1/2" (4889.5)	33 1/4" (844.6)	106 3/4" (2711.5)	114 1/2" (2908.3)
KEY INCHES KEY (mm)	[B-1/2] (B-12.7)	[A+1/2] (A+12.7)	[A/6+1 1/4] (A/6+31.8)	[2A/3-21 1/4] (2A/3-539.8)	[2A/3-13 1/2] (2A/3-342.9)

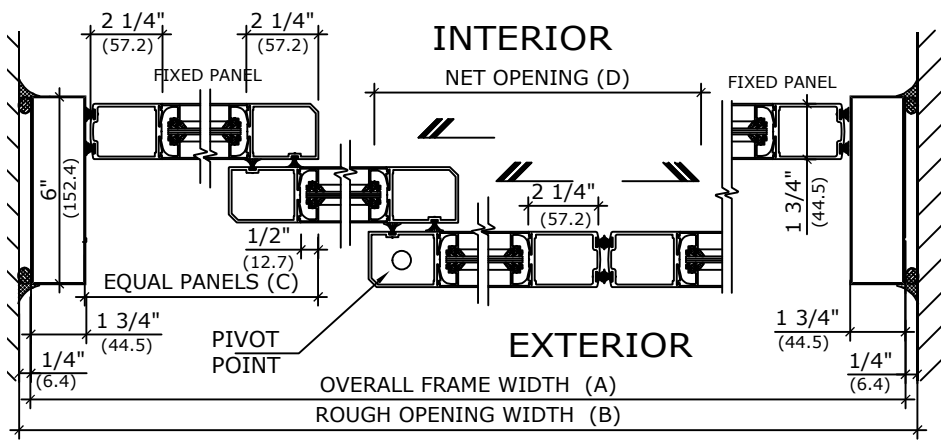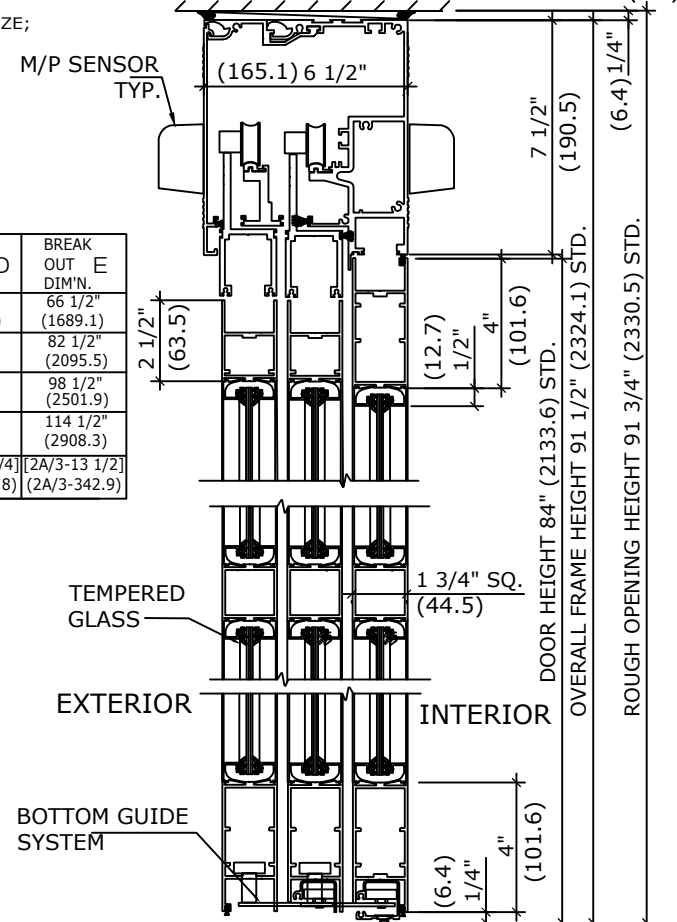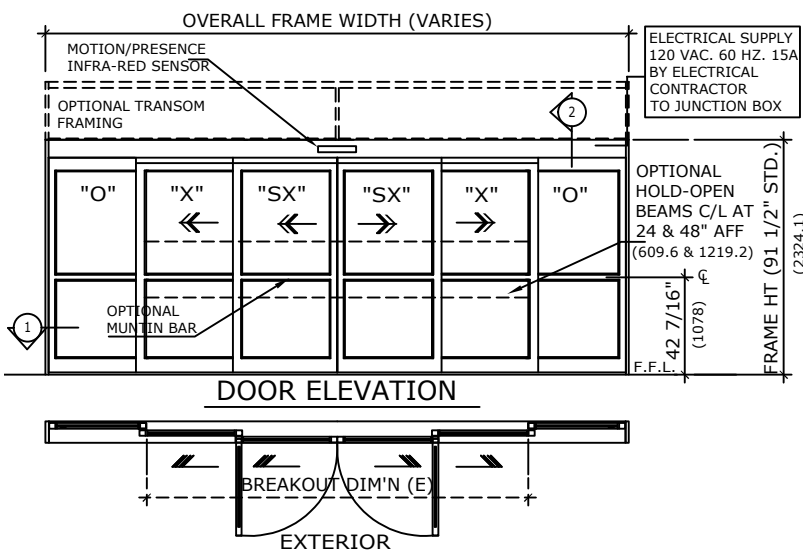

**1 HORIZONTAL SECTION**

REFER TO RELEVANT (LOCAL, STATE, NATIONAL OR AHJ) BUILDING CODE FOR  
MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE FOR EGRESS REQUIREMENT.  
NOTE:  
ENTREMATIC GROUP AB, RESERVES THE RIGHT TO  
CHANGE & IMPROVE IT'S PRODUCTS & SPECIFICATIONS  
WITHOUT NOTICE.

**ENTREMATIC**  
TEL. 877-348-6837 (CANADA)  
www.ditecentrematic.ca  
TEL. 866-901-4284 (USA)  
www.ditecentrematic.us

SHEET TITLE:			SHEET NO. <b>21</b>
ARCHITECT:			
CONTRACTOR:			SECTION <b>DS</b>
DETAIL SCALE	DRAWN BY	DATE	