

AUTOMATIC SLIDING DOOR OPERATOR SHALL BE "DS-18" CUL USA APPROVED, CONFORMING TO UL STD. 325 & ANSI-BHMA STD. A156.10 CERTIFIED TO CAN. CSA STD. C22.2#24-93 AS MANUFACTURED BY ENTREMATIAC GROUP AB.



APPLICATION:
TELESCOPIC FIXED SIDELITE BI-PART,
AUTOMATIC SLIDING DOOR SYSTEM.

STANDARD FINISH: ANODIZED, CLEAR; DARK BRONZE;
SPECIAL FINISHES ARE AVAILABLE

UNIT DESCRIPTION
DITEC
O-X-SX-SX-X-O : OVERHEAD CONCEALED TELESCOPIC FIXED SIDELITE SLIDE DOOR SYSTEM, NARROW STILE DOORS.
PACKAGE SHALL INCLUDE AUTOMATIC OPERATOR, FRAME AND DOORS WITH MUNTINS, BOTTOM RAILS WITH CONCEALED SWEEPS, BRUSH-PILE WEATHER STRIPPING, EMERGENCY BREAKAWAY, MS LOCK, GLAZING STOPS FOR TEMPERED GLASS, DOOR GUIDE SYSTEM SHALL BE CONCEALED IN BOTTOM HORIZONTAL RAILS, 3-WAY SWITCH & MOTION/PRESENCE SENSORS ON BOTH SIDES OF UNIT.

SIZE	OVERALL FRAME WIDTH A	ROUGH OPENING B	EQUAL PANELS C	NET DOOR OPENING D	BREAK OUT DIM'N. E
120"	120" (3048)	120 1/2" (3060.7)	21 1/4" (539.8)	58 3/4" (1492.3)	66 1/2" (1689.1)
144"	144" (3657.6)	144 1/2" (3670.3)	25 1/4" (641.4)	74 3/4" (1898.7)	82 1/2" (2095.5)
168"	168" (4267.2)	168 1/2" (4279.9)	29 1/4" (743)	90 3/4" (2305.1)	98 1/2" (2501.9)
192"	192" (4876.8)	192 1/2" (4889.5)	33 1/4" (844.6)	106 3/4" (2711.5)	114 1/2" (2908.3)
KEY INCHES	[B-1/2]	[A+1/2]	[A/6+1 1/4]	[2A/3-21 1/4]	[2A/3-13 1/2]
KEY (mm)	(B-12.7)	(A+12.7)	(A/6+31.8)	(2A/3-539.8)	(2A/3-342.9)

NOTE: DRAWING IS DIMENSIONED IN BOTH INCHES & METRIC (mm)

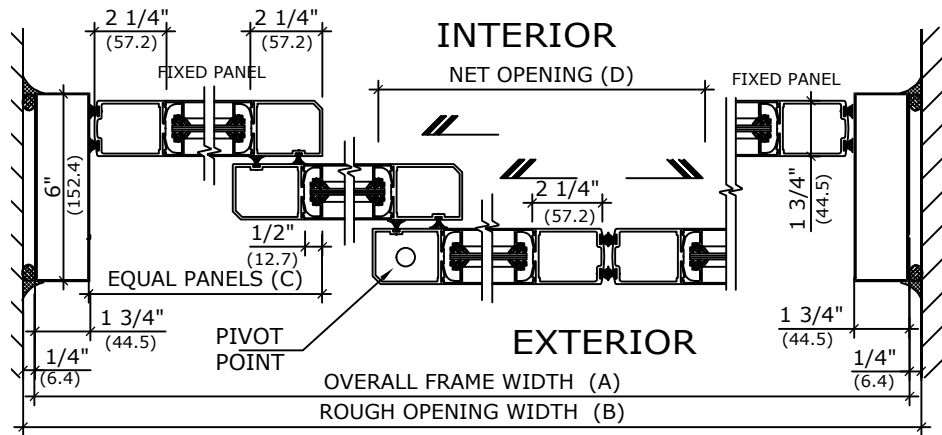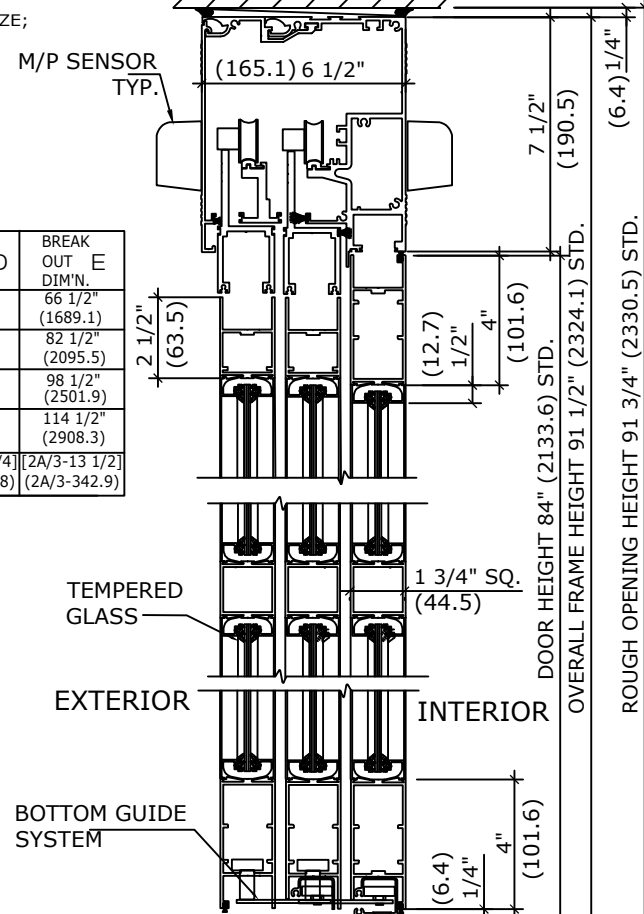

1 HORIZONTAL SECTION

REFER TO RELEVANT (LOCAL, STATE, NATIONAL OR AHJ) BUILDING CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE FOR EGRESS REQUIREMENT.
NOTE:
ENTREMATIAC GROUP AB, RESERVES THE RIGHT TO CHANGE & IMPROVE IT'S PRODUCTS & SPECIFICATIONS WITHOUT NOTICE.

ENTREMATIAC

TEL. 877-348-6837 (CANADA)
www.ditecentrematic.ca
TEL. 866-901-4284 (USA)
www.ditecentrematic.us

SHEET TITLE:			SHEET NO. 21
ARCHITECT:			
CONTRACTOR:			SECTION DS
DETAIL SCALE	DRAWN BY	DATE	